






# Wire Wound Molded SMD Power Inductors Size 20121A




- So saturation
- High current, low DCR, high efficiency
- Very low acoustic noise and very low leakage flux noise
- High reliability
- 100% Lead (Pb)-Free and RoHS compliant
- Operating temperature -40~+125°C (Including self-temperature rise)
- Quantity: 3000pcs

- Note PC power system, incl. IMVP-6
- DC/DC converter

## Dimensions: [mm]

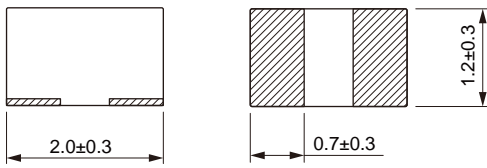

## Land Pattern: [mm]



## Electrical Properties:

---



---



---



---



---




---












---

Saturation Current will cause L to drop approximately 30%  
 Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$




# Typical Electrical Characteristics:

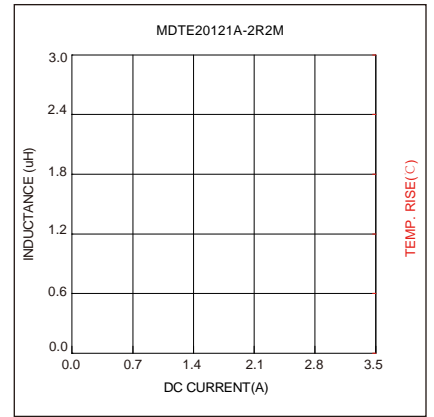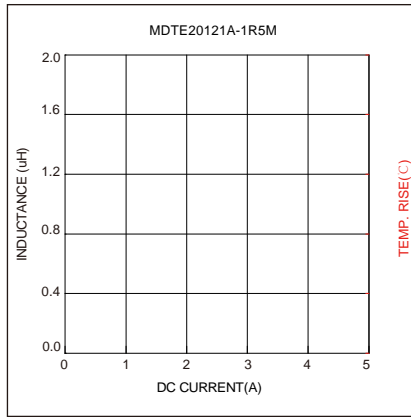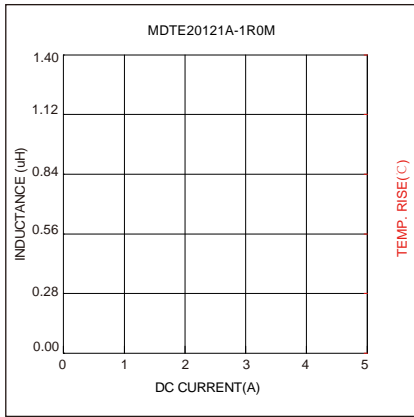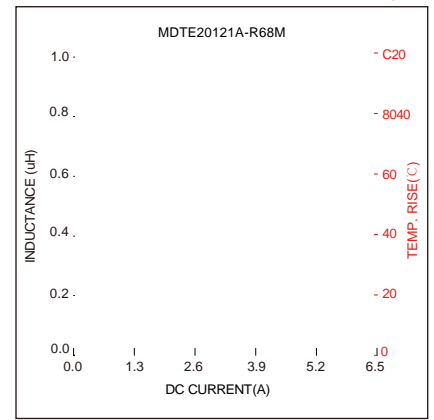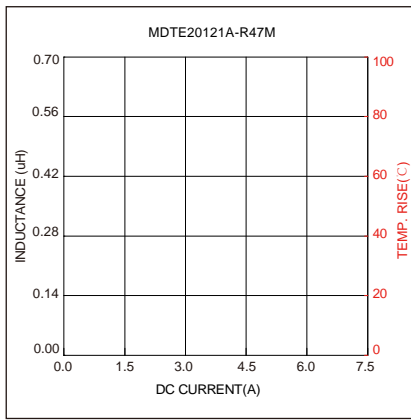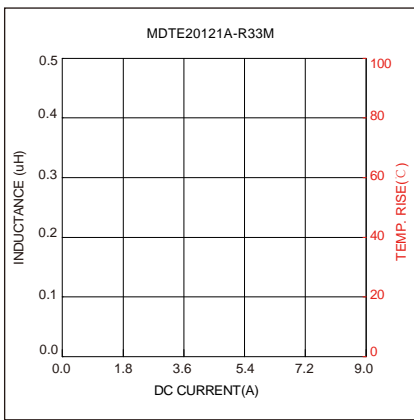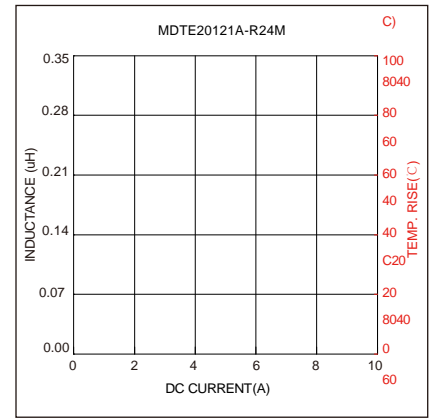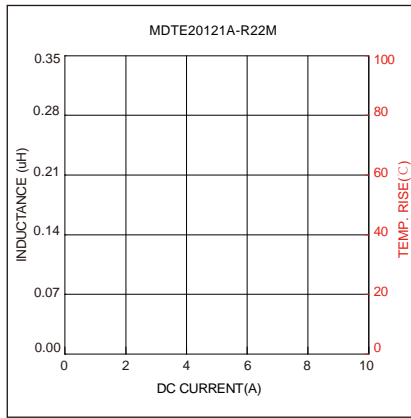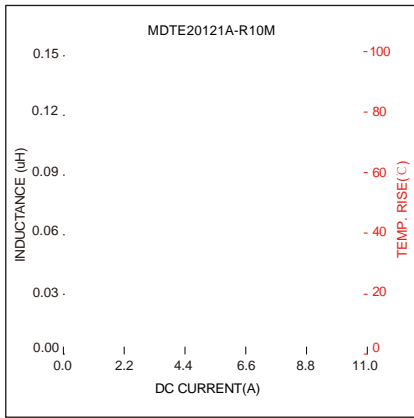

## Soldering Reflow:


## Packaging Information:

### Tape Dimension:

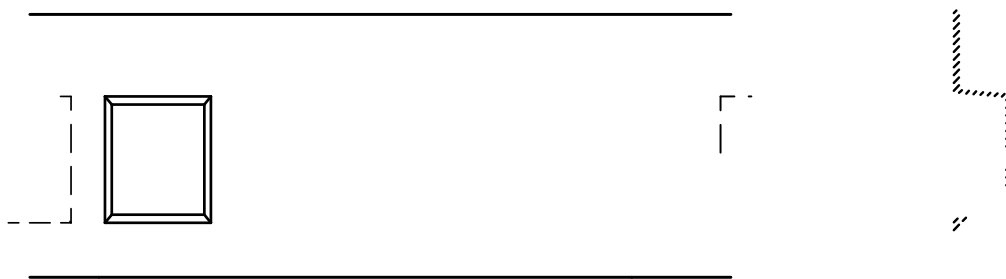

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTE20121A	1.5± 0.1	2.3± 0.1	1.5± 0.1	4.0± 0.1	4.0± 0.1	8.0± 0.1	1.2± 0.1	1.75± 0.1	0.25± 0.05


### Peel force of top cover tape:

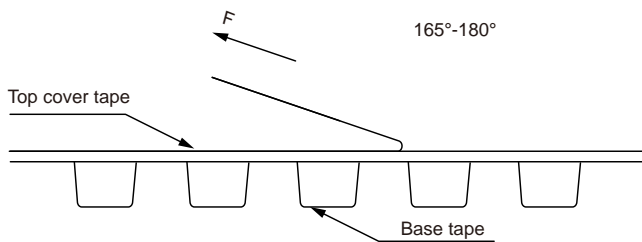

The peel force of top cover tape shall be between 0.1 to 0.98 N



Reel Dimension: [mm]

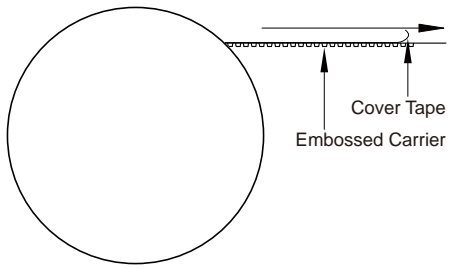

Packaging Quantity: