


NRSE Series

CHARACTERISTICS



Satura on Satura on


		(m)	(m)
3.10	2.80	3.70	33.0
2.90	2.40	3.00	41.0
2.60	2.30	2.30	50.0
2.20	2.00	1.95	63.0
1.60	1.45	1.65	96.0
1.20	1.10	1.35	145
1.15	1.05	1.20	215
0.95	0.85	1.00	290
0.80	0.70	0.75	400
0.60	0.55	0.70	610
0.60	0.53	0.68	730
0.60	0.50	0.65	800
0.42	0.36	0.62	1100
0.38	0.30	0.50	1300
0.36	0.30	0.32	1400

	(μH)							
NRSE2016-R24M	0.24							
NRSE2016-R33M	0.33							
NRSE2016-R47M	0.47							
NRSE2016-R68M	0.68							
NRSE2016-1R0M	1.00							
NRSE2016-1R5M	1.50							
NRSE2016-2R2M	2.20							
NRSE2016-3R3M	3.30							
NRSE2016-4R7M	4.70							
NRSE2016-6R8M	6.80							
NRSE2016-8R2M	8.20							
NRSE2016-100M	10.0							
NRSE2016-120M	12.0							
NRSE2016-150M	15.0							
NRSE2016-220M	22.0							

Operating temperature: -40°C ~ +125°C


Temperature rise current: the actual value of DC current when the temperature rise is T40C

Saturation Current that will cause initial inductance to drop approximately 30%

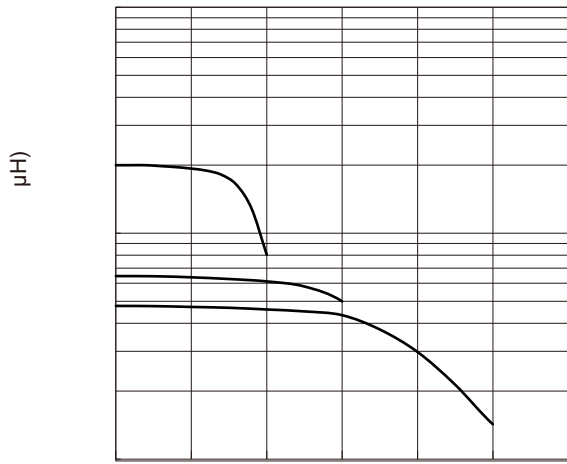

CURRENT(A)

c)

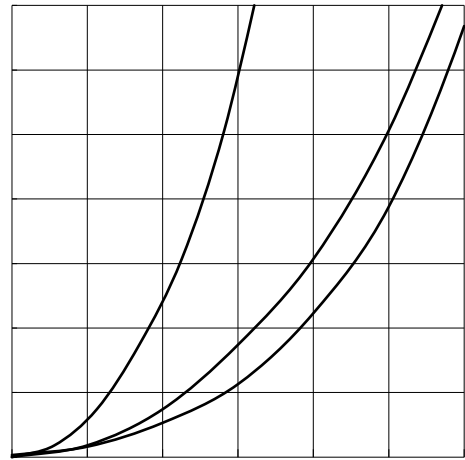

CURRENT(A)