WIV Series
Wire Wound Inductor
Size 1608



FEATURES

- Ferrite core wire wound construc on
- High Reliability due to wire wound type construc on
- Small footprint as well as low profile
- Applica on for DC power line
- Lead-free reflow soldering as referenced in JEDEC J-STD 020D

- AEC-Q200 qualified
- Opera ng temperature-55~+125℃

- Quan ty: 3000 pcs

APPLICATION

-
- DC/DC converters, switch-mode power supplies
- Entertainment equipment: car naviga ons, car audios
- Body control equipment like wipers, power windows

Dimensions: [mm]

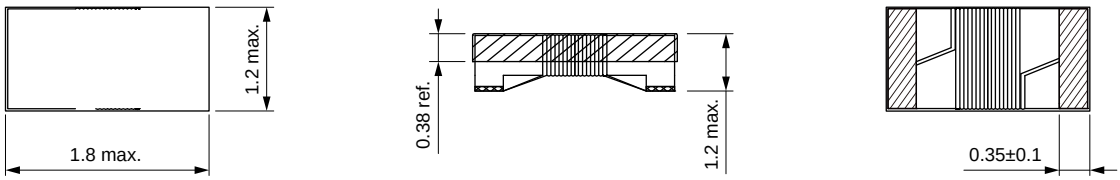

Electrical Properties:

	Inductance	Tolerance	Test Frequency	Q Min.	Test Frequency		DC Resistx.ance	[illegible]

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

Part No	Inductance	Tolerance	Test Frequency	Q Min.	Test Frequency	Temperature Rise Current Max.	DC Resistance Max.	SRF Min.